



VORTEX AMBALAJ


SPEC SHEET

Gaskets & Felt

Sealing, vibration and dust control.

Gaskets & Felt

Sealing, vibration and dust control.

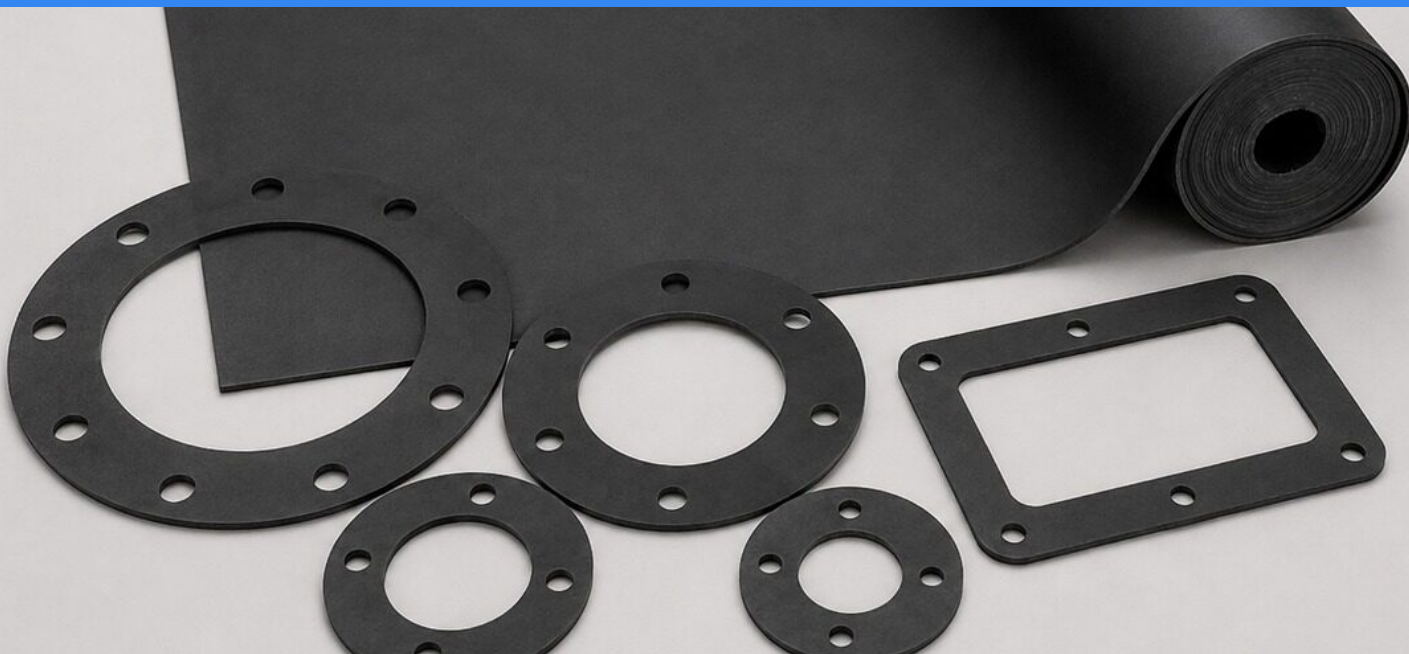

A gasket closes the gap between two surfaces, stopping liquid, dust, air or sound from passing. Choosing one depends less on the material than on the application: the medium it will meet, the temperature range, how far it will be compressed and how flat the mating surface is. VORTEX cuts EPDM, EVA and rubber gasket materials — and coloured felt — from sheet to your product's dimensions. Profile, thickness and hole pattern follow the part itself, and repeat orders are produced to the approved sample.

SCOPE

- + EPDM, EVA and rubber gaskets
- + Coloured felt and shaped cutting
- + Cut to profile, hole pattern and contour
- + Self-adhesive option

APPLICATIONS

- + Control cabinets and covers
- + Automotive and white goods
- + Ventilation and plant
- + Decorative and display work

TECHNICAL DATA

MATERIALS

EPDM, EVA, rubber, felt

CUTTING

Steel-rule die, CNC, waterjet

THICKNESS

Set by the project

ADHESIVE

Single-sided, optional



GASKETS & FELT · PRODUCT FORMS

EPDM Gasket

An EPDM gasket is cut from a synthetic rubber that does not crack under ozone or UV, giving weather-exposed lids, panels and enclosures a lasting barrier against water and dust.

- Ozone and UV resistant
- Suitable for outdoor use
- Solid or closed-cell sponge
- Resists water and steam
- Die-cut to your dimensions
- Adhesive-backed on request



GASKETS & FELT · PRODUCT FORMS

EVA Gasket

An EVA gasket is a light sealing and cushioning part cut from closed-cell EVA foam; it compresses under low closing force to give an economical barrier against dust, moisture and vibration.

- Closed cell — does not absorb water
- Low closing force
- Light and economical
- Clean die-cut edge
- Vibration and noise damping
- Adhesive-backed option



GASKETS & FELT · PRODUCT FORMS

Rubber Gasket

A rubber gasket is cut from NBR, EPDM, silicone or neoprene according to the environment it serves; choosing the right rubber decides its service life more than thickness or price ever will.

- Rubber chosen for the environment
- Solid, sponge or fabric-reinforced
- Cut to size from your drawing
- Flange, frame and ring gaskets
- Oil, water or steam resistance
- Adhesive-backed on request



GASKETS & FELT · PRODUCT FORMS

Coloured Felt

Coloured felt is a needle-punched non-woven surface whose colour runs right through the material, so a cut edge matches the body. Used for decorative letter and shape cutting, linings and interlayers.

- Colour through, matching edge
- No fraying, no loose threads
- Steel-rule die and CNC cutting
- Wide colour range
- Roll and sheet form
- Self-adhesive backing option



VORTEX AMBALAJ

Request a Quote

Describe your load and our technical team will come back within 24 hours with sizing, material and a protection design.

PHONE

+90 530 886 89 93 · +90 216 393 57 56

EMAIL

info@vortexambalaj.com

ADDRESS

Aydınlı Mah. Egemen Sok. No: 30/2, 34953 Tuzla
/ İstanbul, Türkiye

WEB

vortexambalaj.com

HOURS

Weekdays 08:00 – 18:00

SOCIAL

[instagram.com/vortexambalaj](https://www.instagram.com/vortexambalaj)